
• VAHLE

APOS POSITIONING SYSTEM

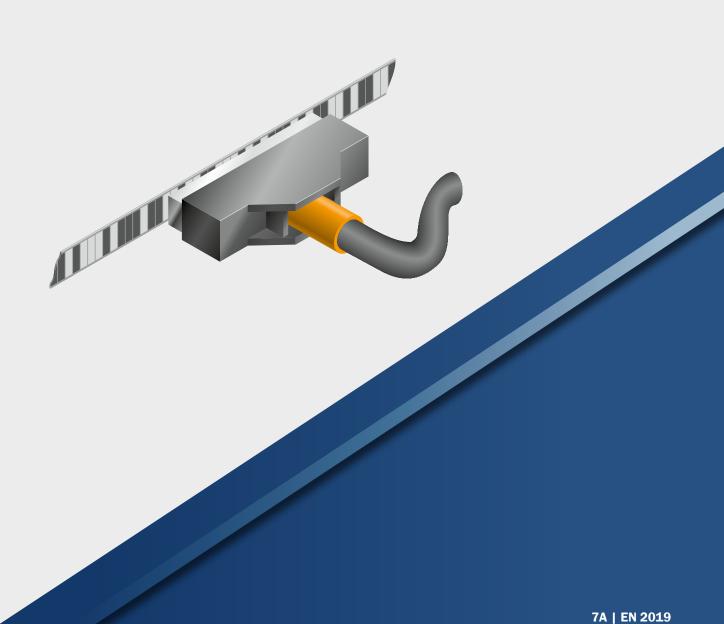


APOS POSITIONING SYSTEMS WITH VAHLE CONDUCTOR LINES

APOS positioning systems were developed for automated handling systems in material flow technology.

The control system can constantly query the absolute position of the mobile consumer.

OPERATING PRINCIPLE

VAHLE-APOS consists of a code strip with a magnetic length coding as a reading head with integrated logic, which transmits the position to the control system via the interface. The intelligent reading head determines the position from the code strip and evaluates it for downstream control systems for processing.

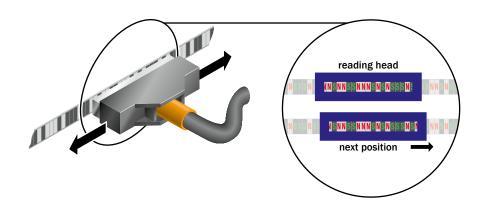

SYSTEM ADVANTAGES

- absolute position determination up to 524 m
- Space-saving solutions for integration into the powerail system or for installation in parallel to the runway
- retrofittable for U 10, FABA 100 and VKS 10
- absolute position immediately available when switching on or after a power failure
- travel speed up to 6 m/s

- reliable position detection even in humid or dusty environments
- trouble-free functionality even in poor lighting conditions
- the system enables the combination of horizontally and vertically combined handling equipment
- wear detection (depending on interface)

OVERVIEW OF APOS COMPONENTS

CODE STRIP



The code strip comes factory assembled with a cross-magnetised specified code and is thus given a digital length coding.

CODE RAIL



The code rail consists of the support profile ⁽¹⁾, the code strip ⁽²⁾ and the sliding strip ⁽³⁾. The sliding strip serves for the mounting and sliding guidance of the APOS LKG-17 reading head.

LKG-17 READING HEAD



Sliding scanner for powerail systems U 10, VKS 10 and FABA 100.

LB-15 READING HEAD



Contactless scanning for powerail systems KBH and MKL.

READING HEAD CARRIER LW




Guide carrier for the mounting of the LB contactless reading head for KBH and MKL conductor line systems.

SU INTERFACE MODULE



Logging of APOS to CANopen, Profibus DP and others.

INTELLIGENT POSITIONING SOLUTIONS WITH VAHLE AND APOS PERFECTLY INTEGRATED AND RETROFITTABLE

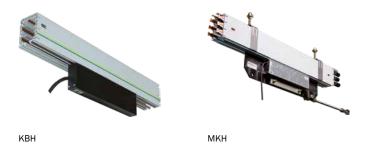

RANGE OF PRODUCTS: READING HEADS (CONTACTLESS)

Туре	Protocol	Order No.
LK-LB15A-RS485-5000-54	RS485	10016941
LK-LB15A-STAHL2-5000-54	STAHL2	10016942
LK-LB15A-SSI_BC-5000-54	SSI Binary protocol	10016943
LK-LB15A-SSI_GC_PRE-5000-54	SSI GRAY (Siemens)	10016945
LK-LB15A-SSI_GC_PST-54	SSI GRAY (SEW)	10016946

RANGE OF PRODUCTS: ACCESSORIES

Туре	Description	Order No.
LK-LWK	Reading head carrier LWK/KBH conductor system	2823445
LK-LWM	Reading head carrier LWM / MKH conductor system	2823261
APOS-SU-1-RS485/PB-LB+V	Interface module / contactless B RS485 / Profibus	2823263
ZB-ZAK	Accessories APOS – KBH/ZAK. 1x right end and 1x left end and fix point	2823281
ZB-ZAM	Accessories APOS - MKL/MKH - ZAM 1x right end and 1x left end and fix point	2823282
FP75-25-KBH	Fixing profile FP 75-25 / KBH	2823257
FP75-20-MKH	Fixing profile FP 75-20 / MKH	2823280
CB-75/15-262	Code strip 7,5 mm KBH/MKH	2823254
MZ-EZR9/10-MKL/H	Conductor threading tool	234730

AVAHLE

Paul Vahle GmbH & Co. KG

Westicker Str. 52 59174 Kamen Germany

Tel.: +49 2307 704-0 Fax: +49 2307 704-444 info@vahle.de

www.vahle.com